


# Protel's Drop-In Anti-Derailing Air/Water Hose Reels

## Protel Slow-Return Hose Reel

1/4' Female NPT Brass Hose Swivel

Available in right and left hand rotation  
KIT0000497(L)  
KIT0000498(R)

Rugged Steel Construction

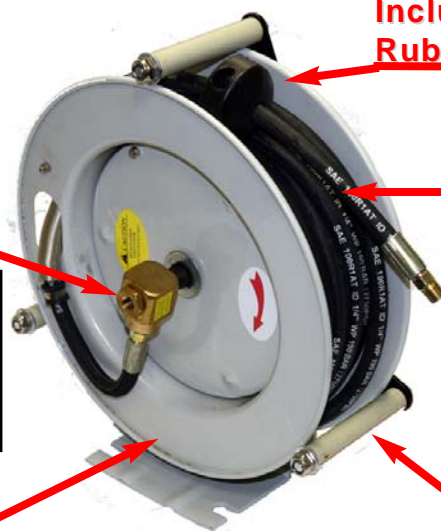

Includes Adjustable Rubber Hose Stop

Includes 25' of 2,750psi 1-wire Steel Braided Hose

1/4' Male NPT Solid Steel Hose Fitting

\*Optional 1/4' Male NPT Brass Swivel Fitting

Includes 3-Point Anti-Derailing Hose Reel Bracket

## HOSE REEL FEATURES:

- \* Protel's Hose Reel delivers slow retraction speed for safer operation and increased equipment life.
- \* 3-Point Hose Reel Bracket prevents hose derailing, avoiding unnecessary service calls due to jammed hose reel.
- \* 25-feet of 2,750 psi, 1-wire steel braided hose provides years of reliable service.
- \* Protel's Hose Reels also features left and right hand rotation, providing access to all of the reel's fittings for easy service.
- \* Each kit includes: a Hose Reel, 3-Point Bracket, 25' of Hose with a Rubber Hose Stop and all Mounting Hardware.
- \* Features Easy Maintenance drop in design


Reels Ship Complete with Hose. Spare Hoses can be Ordered Separately. See Reverse Side for Detailed Hose Specification

Powered by  
**Protel**<sup>®</sup>  
Innovation is our business

Rev 5 Sept 2011

Call Sales for more details  
800-925-8882

# Protel's Wire Braid Hydraulic Hose

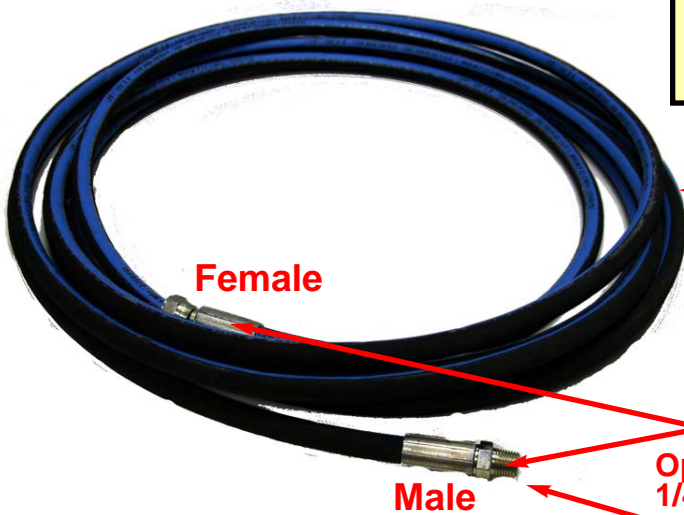

**KIT0000525**  
**25' of 2,750 psi, 1-wire Steel Braided Hose**

**High Pressure Hydraulic Oil Line Nitril Tube with 1-Wire Steel Braid**

**Thick Tough Outer Layer of Hose Not Affected by Heat, UV Exposure or the Exposure to Petroleum Oil Products**

**1/4' Male & Female NPT Damage Resistant Solid Steel Hose Fittings (Part No: KIT0000525)**

**Option: Male Pipe Swivel Male Connector 1/4" Male Swivel (Part No: KIT0000525-001)**

## Hose Comparable Chart

### Protel's Hydraulic Hose vs Typical Competitor's Pressure Wash Hose

	Protel's KIT0000525 SAE 100R1AT Hydraulic Hose	Typical Competitor's Pressure Wash Hose
Nominal ID	1/4"	1/4"
Nominal OD	.55"	.5"
Application, Working Pressure	High Pressure Hydraulic Oil Hose 2,750 psi	Pressure Washer Hose 300 psi
Construction	Nitrile tube with 1- wire braid and neoprene cover.	Non Braided Rubber Hose
Weather Resistance	Not affected by heat or UV exposure. Hose incorporates a thicker tougher outer layer. No reports of separation.	Hose or hose cover discolors when exposed to heat or UV light with some reports of outer wall separation
Fittings	Steel, rated for 3,000 psi	Brass, rated for 300 psi
Fittings Installation	Installation requires a hydraulic crimping tool.	Can be installed with a hand held crimping tool
Durability	Steel fittings resist damage	Brass fittings are subject to damage, especially by impact from hose reels
Repair	Steel fittings can be replaced in the field with brass fittings using a handheld crimping tool.	Brass fittings can be replaced in the field with a handheld crimping tool