


SIM CARD INSTALLATION PROCEDURES

MANUFACTURER RECOMMENDATIONS

Disconnect ALL power and completely remove the Pro-Star[®] AVW400 monitor from the tower to insure proper installation



- 1) The SIM tray is located on the right side of the Pro-Star[®] AVW400 monitor near the three LEDs labeled TX, RX, and S. Using a pen or other pointed object, depress the actuator to the right of the SIM tray to open the tray. The tray will pop out about 1/8 inch when the actuator is depressed.

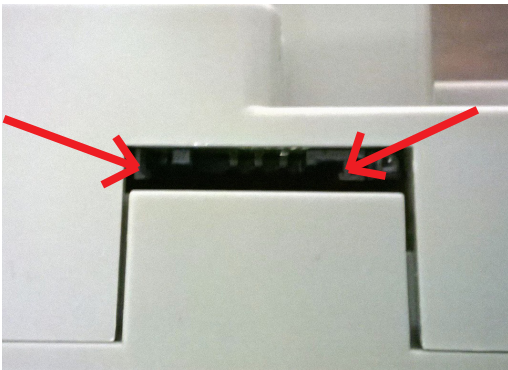

- 2) Pull the tray out of the Pro-Star[®] AVW400 monitor.
- 3) Install the SIM in the tray with the gold contacts facing up out of the tray. Note the location for the notch on one corner of the SIM. Make sure when inserting the tray into the Pro-Star[®] AVW400 monitor that it locks onto the guide rails inside.



- 4) With the SIM installed in the tray, carefully slide the tray all the way back into the slot on the right side of the Pro-Star[®] AVW400 monitor. The tray should be flush with the side of the monitor when correctly installed.